



SCREWBOLT Anchors

**Medium duty anchor for
use in solid substrates.
Ideal for close to edge/
close to anchor installation.**

**PRODUCT RANGE
GUIDE**

MACSIM®

SCREWBOLTS RANGE

BASE MATERIALS



Concrete



Reinforced
Concrete



Hollow Brick

CHARACTERISTICS

- 100% removable
- Suitable when reduced distances between anchors or from edges are required.
- Pre drill-hole required. Works by interference between thread & concrete.
- Use for heavy loads
- Direct installation
- Installation through element to be fixtured
- Use in concrete and re-inforced concrete

APPLICATIONS

- Structural fixings in interior conditions
- Glazing, windows and shop windows
- Shelving and racks
- Handrails and bannisters
- Steel structures, ducts, machinery, boilers, signs, stadium seating
- Wood structures to concrete structures

RANGE

SBH

Flanged Hex Head

Yellow Zinc Plated



SBGH

Flanged Hex Head

Galvanised



SBSSH

Flanged Hex Head

316 Stainless Steel



SBC

Countersunk Head

Yellow Zinc Plated



SBGC

Countersunk Head

Galvanised



SBR

Threaded Rod Head

Zinc Plated



SBCU

Csk.Undercut Head

Yellow Zinc Plated



SBGCU

Csk.Undercut Head

Galvanised



SBT

Tie Down Head

Yellow Zinc Plated



SBTG

Tie Down Head

Galvanised



SBGE

Eyebolt Head

Galvanised



SBGS


Swag Hook Head

Galvanised



ESPECIALLY FOR
REDUCED DISTANCES
BETWEEN ANCHORS OR
FROM EDGES

QUICK ASSEMBLY
INSTALLATION
50% FASTER

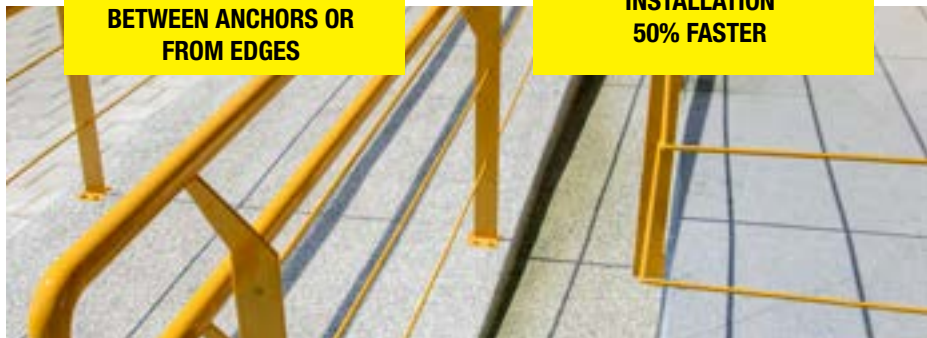

Sydney Sales

10 Wonderland Dr
Eastern Creek
NSW 2766
P: (02) 9881 2450
F: (02) 9881 2455

MACSIM®